

ÉÉC Saint-Jean-Bosco: 55 Abbotside Way, Caledon, ON, L7C 4C3

Project title: Fence relocation and drainage repair

Objective: Work under this contract involves the existing fences relocation and drainage repair.

Scope of work

1. Fence relocation:
 - a) Relocate existing fences as shown in the photo
 - b) Cut all the existing seven trees in the enclosure and replace them at another location within the school's property.
2. Concrete curbs:
 - a) Excavate existing soils as required to install new concrete curbs including new epoxy-coated reinforcing steel.
 - b) New concrete curbs to be 32MPa Class C2 concrete.
 - c) Repair the damaged asphalt
3. Sods:


Supply soils and sods and cover the slopes.

Work Schedule

Please note the following constraints:

- Site work to begin on **July 1st, 2026**, with a substantial completion date of **August 11, 2026**. Full completion must be achieved by **August 15, 2026**.
- Daycare and summer camps may be operating throughout the summer. The contractor will be responsible for coordinating the work with the Board's Project Officer to provide a safe fence enclosure and secure access to the designated areas (daycare and summer camp).

With the above in mind, please provide an overall work/project schedule including the material lead time.

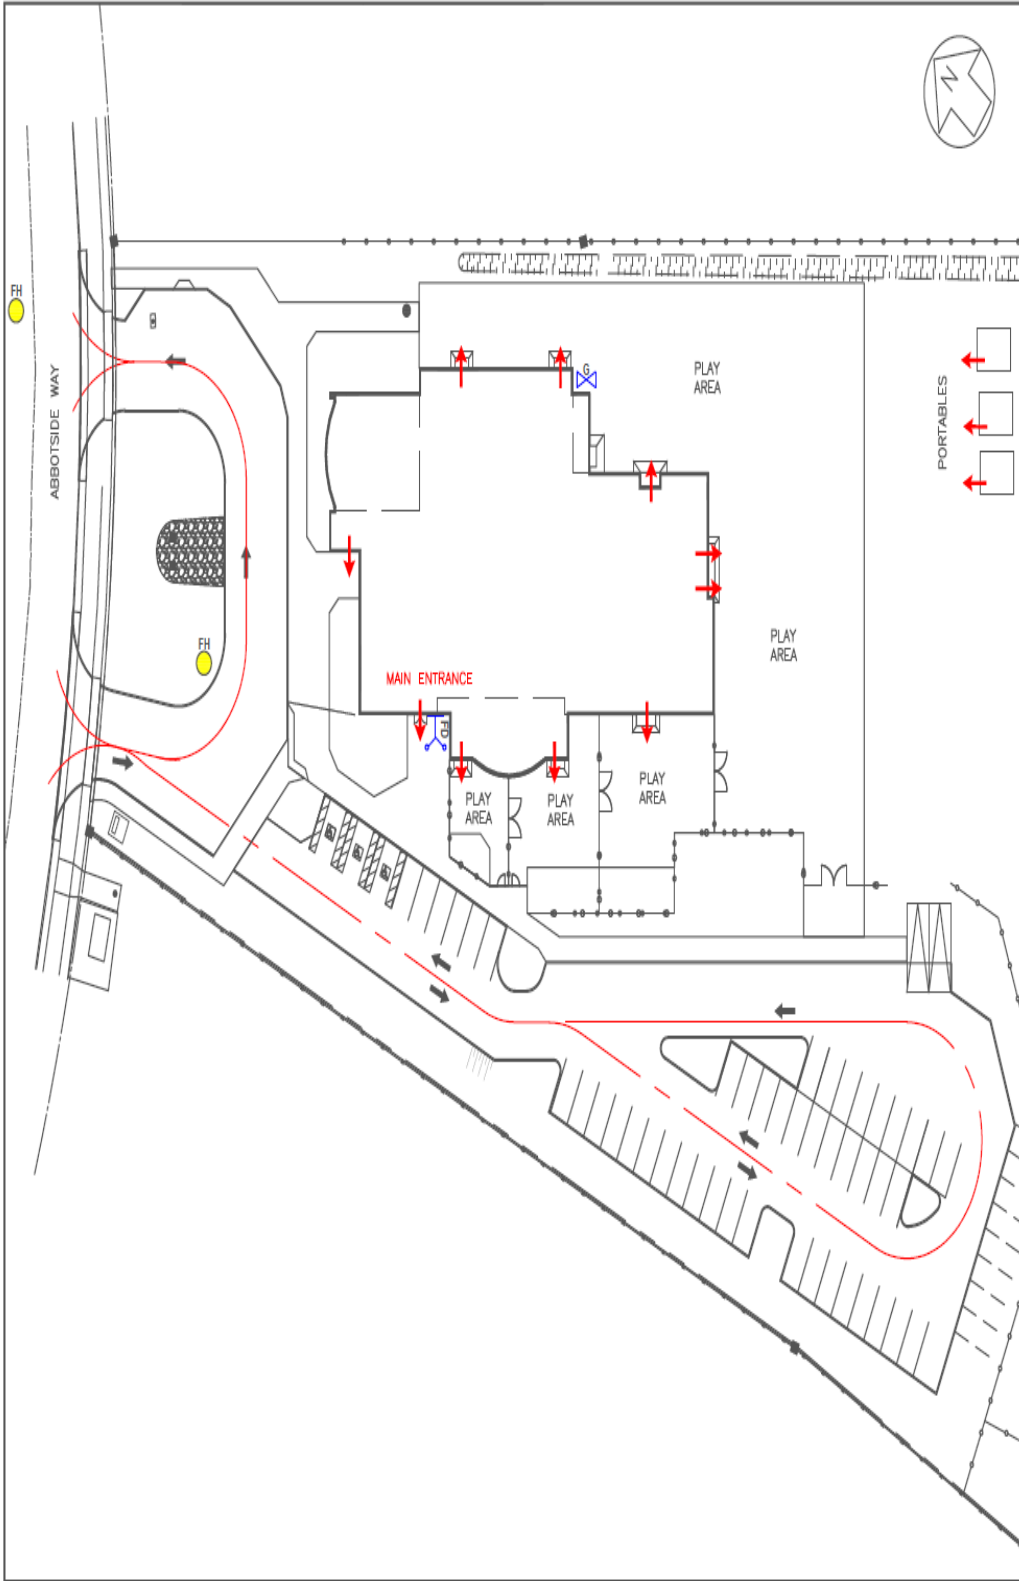

LEGEND

- ➔ EXIT
- FH FIRE HYDRANT
- FD FIRE DEPARTMENT CONNECTION
- G GAS SHUT OFF
- FIRE ROUTE



Facility École élémentaire catholique
Saint-Jean-Bosco

55 Abbotside Way
Caledon, Ontario


Sheet Title
Site- Rev Sept 2024

Date issued
June 2016-Rev

Scale
nts

Sheet No.

FSP-1

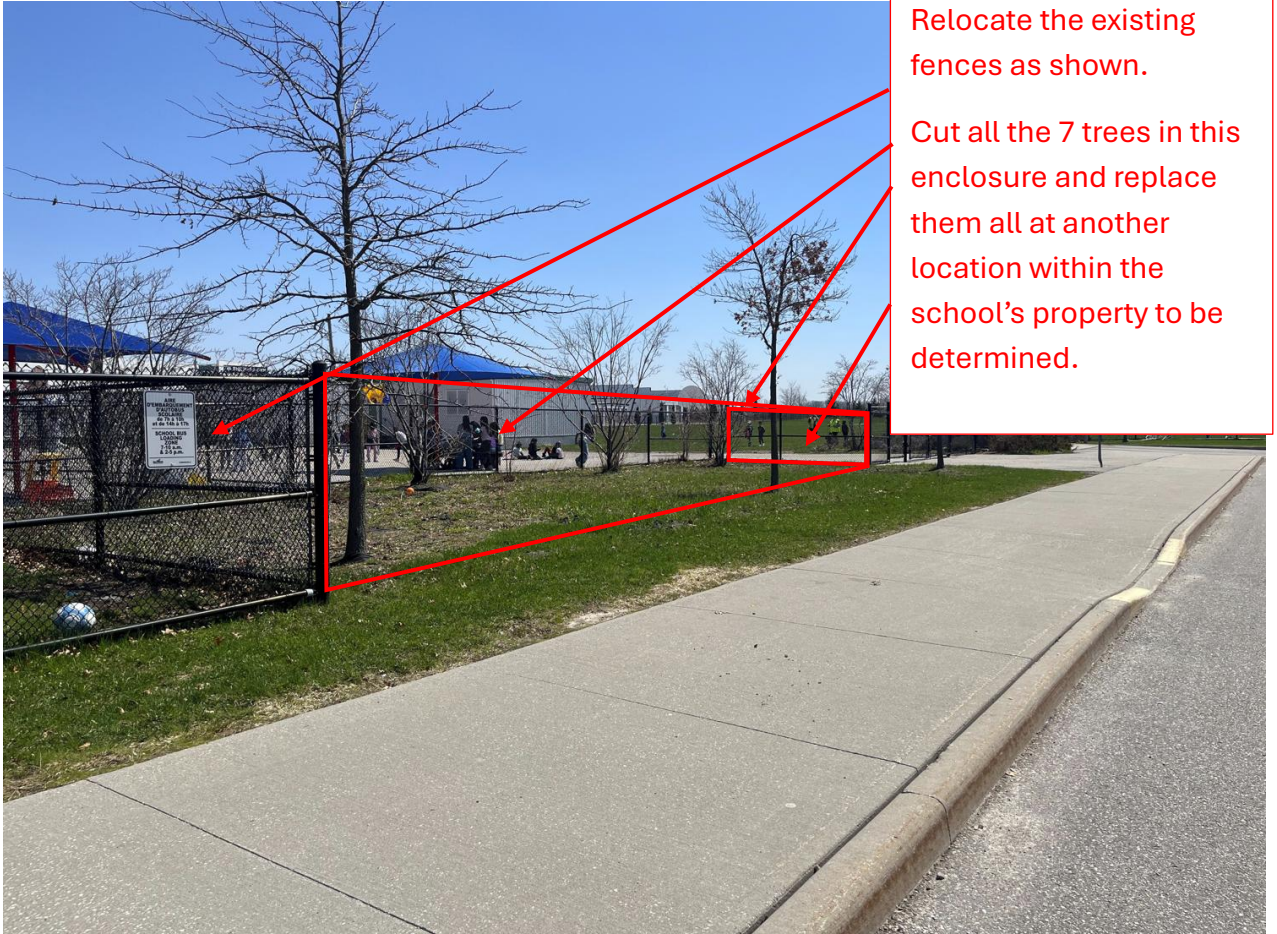

Relocate the existing fences as shown.

Cut all the 7 trees in this enclosure and replace them all at another location within the school's property to be determined.

Repair the damaged asphalt

Install retaining walls and curbs to protect the asphalt path.



